


Two hole 45°

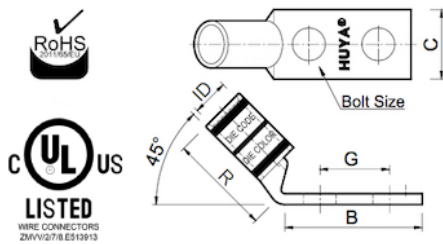


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8
Celestra	A45	Gray	29

Cat. Nos	Wire Size		Dimension (in.)						
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID	Std. Pkg.
DB041458F	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.28	0.52	0.63	0.75	0.27	100
LB041458F	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.19	0.52	0.63	1.05	0.27	100
LB041434F	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.31	0.56	0.75	1.05	0.27	100
LB041401F	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.88	0.58	1.00	1.05	0.27	100
LB045601F	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	5/16	1.75	0.56	1.00	1.05	0.27	100
LB043801F	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.98	0.59	1.00	1.05	0.27	100
LB041243F	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	3.00	0.88	1.75	1.05	0.27	100
DB041058F-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.17	0.55	0.63	1.06	0.28	100
DB041034F-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.29	0.55	0.75	1.06	0.28	100
DB041458F-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.25	0.55	0.63	1.06	0.28	100
DB041434F-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.37	0.55	0.75	1.06	0.28	100
DB041401F-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.62	0.55	1.00	1.06	0.28	100
DB043801F-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.84	0.62	1.00	1.06	0.28	100
DB041458F-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.26	0.49	0.62	1.06	0.26	100
DB043801F-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.83	0.58	1.00	1.06	0.26	100
DB041401F-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.64	0.49	1.00	1.06	0.26	100
DB041243F-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	2.83	0.83	1.75	1.06	0.26	100
DB041434F-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.39	0.49	0.75	1.06	0.26	100
DB045601F-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	5/16	1.70	0.52	1.00	1.06	0.26	100
DB041458F-251	4 AWG	105/24 #4 Weld	1/4	1.25	0.55	0.63	0.78	0.28	100
DB041434F-251	4 AWG	105/24 #4 Weld	1/4	1.37	0.55	0.75	0.78	0.28	100
DB041401F-251	4 AWG	105/24 #4 Weld	1/4	1.62	0.55	1.00	0.78	0.28	100
DB045601F-251	4 AWG	105/24 #4 Weld	5/16	1.74	0.55	1.00	0.78	0.28	100
DB043801F-251	4 AWG	105/24 #4 Weld	3/8	1.84	0.62	1.00	0.78	0.28	100
DB041058F-261	4 AWG	105/24 #4 Weld	#10	1.15	0.41	0.62	0.75	0.28	100
DB041001F-261	4 AWG	105/24 #4 Weld	#10	1.52	0.41	1.00	0.75	0.28	100
DB041458F-261	4 AWG	105/24 #4 Weld	1/4	1.26	0.55	0.62	0.75	0.28	100
DB041434F-261	4 AWG	105/24 #4 Weld	1/4	1.39	0.55	0.75	0.75	0.28	100
DB041401F-261	4 AWG	105/24 #4 Weld	1/4	1.64	0.55	1.00	0.75	0.28	100
DB045601F-261	4 AWG	105/24 #4 Weld	5/16	1.70	0.55	1.00	0.75	0.28	100
DB043801F-261	4 AWG	105/24 #4 Weld	3/8	1.83	0.58	1.00	0.75	0.28	100
DB041243F-261	4 AWG	105/24 #4 Weld	1/2	2.83	0.83	1.75	0.75	0.28	100
LB041458F-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.25	0.55	0.63	1.30	0.28	100
LB041434F-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.37	0.55	0.75	1.30	0.28	100
LB043801F-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.84	0.62	1.00	1.30	0.28	100
LB041058FP-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.17	0.55	0.63	1.30	0.28	100

Two hole 45°

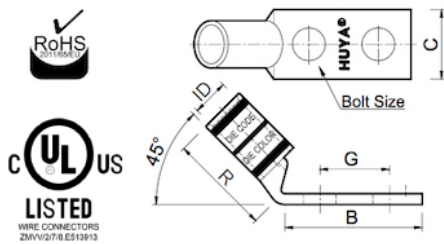

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8
Celestra	A45	Gray	29

Cat. Nos	Wire Size		Dimension (in.)						
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID	Std. Pkg.
LB041034FP-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.29	0.55	0.75	1.30	0.28	100
LB041458FP-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.25	0.55	0.63	1.30	0.28	100
LB041434FP-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.37	0.55	0.75	1.30	0.28	100
LB043801FP-250	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.84	0.62	1.00	1.30	0.28	100
LB041243F-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	2.83	0.81	1.75	1.37	0.26	100
LB041458F-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.26	0.50	0.62	1.37	0.26	100
LB041434F-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.39	0.50	0.75	1.37	0.26	100
LB043801F-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.83	0.56	1.00	1.37	0.26	100
LB041243FP-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	2.83	0.83	1.75	1.37	0.26	100
LB041034FP-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.27	0.49	0.75	1.37	0.26	100
LB041458FP-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.26	0.49	0.62	1.37	0.26	100
LB041434FP-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.39	0.49	0.75	1.37	0.26	100
LB043801FP-260	4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.83	0.58	1.00	1.37	0.26	100
LB041458FP-251	4 AWG	105/24 #4 Weld	1/4	1.25	0.55	0.63	1.30	0.28	100
LB041434FP-251	4 AWG	105/24 #4 Weld	1/4	1.37	0.55	0.75	1.30	0.28	100
LB043834FP-251	4 AWG	105/24 #4 Weld	3/8	1.59	0.62	0.75	1.30	0.28	100
LB043801FP-251	4 AWG	105/24 #4 Weld	3/8	1.84	0.62	1.00	1.30	0.28	100
LB043834FP-261	4 AWG	105/24 #4 Weld	3/8	1.58	0.58	0.75	1.50	0.28	100
LB043801FP-261	4 AWG	105/24 #4 Weld	3/8	1.83	0.58	1.00	1.50	0.28	100
LB041458FP-261	4 AWG	105/24 #4 Weld	1/4	1.27	0.55	0.63	1.50	0.28	100
LB041434FP-261	4 AWG	105/24 #4 Weld	1/4	1.39	0.55	0.75	1.50	0.28	100