


Two hole 45°

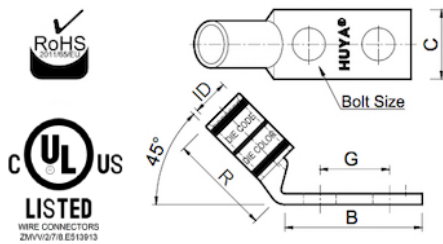


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13
Celestra	A45	Black	45

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID	Std. Pkg.
DB205678F	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.63	0.83	0.88	1.00	0.44	100
DB203801F	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.93	0.83	1.00	1.00	0.44	100
DB201201F	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.81	0.83	1.00	1.00	0.44	100
LB201458F	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.25	0.83	0.63	1.35	0.44	100
LB201434F	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.31	0.81	0.75	1.35	0.44	100
LB203801F	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.81	0.83	1.00	1.35	0.44	100
LB203801FP	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.81	0.83	1.00	1.35	0.44	100
LB201243F	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.81	0.83	1.75	1.35	0.44	100
DB201458F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.41	0.85	0.62	1.28	0.45	100
DB201434F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.53	0.85	0.75	1.28	0.45	100
DB205678F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.66	0.85	0.88	1.28	0.45	100
DB203801F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.84	0.85	1.00	1.28	0.45	100
DB201243F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.01	0.85	1.75	1.28	0.45	100
DB205678F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.57	0.83	0.88	1.24	0.44	100
DB201243F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.83	0.83	1.75	1.24	0.44	100
DB201458F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.26	0.83	0.62	1.24	0.44	100
DB201401F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.64	0.83	1.00	1.24	0.44	100
DB201434F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.39	0.83	0.75	1.24	0.44	100
DB203801F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.83	0.83	1.00	1.24	0.44	100
DB201458F-251	2/0 AWG	325/24 2/0 Weld	1/4	1.41	0.96	0.62	1.13	0.51	100
DB201434F-251	2/0 AWG	325/24 2/0 Weld	1/4	1.53	0.96	0.75	1.13	0.51	100
DB205601F-251	2/0 AWG	325/24 2/0 Weld	5/16	1.78	0.96	1.00	1.13	0.51	100
DB203801F-251	2/0 AWG	325/24 2/0 Weld	3/8	1.84	0.96	1.00	1.13	0.51	100
DB201201F-251	2/0 AWG	325/24 2/0 Weld	1/2	2.09	0.96	1.00	1.13	0.51	100
DB201243F-251	2/0 AWG	325/24 2/0 Weld	1/2	3.01	0.96	1.75	1.13	0.51	100
DB201458F-261	2/0 AWG	325/24 2/0 Weld	1/4	1.26	0.93	0.62	1.11	0.50	100
DB201434F-261	2/0 AWG	325/24 2/0 Weld	1/4	1.39	0.93	0.75	1.11	0.50	100
DB205601F-261	2/0 AWG	325/24 2/0 Weld	5/16	1.70	0.93	1.00	1.11	0.50	100
DB203801F-261	2/0 AWG	325/24 2/0 Weld	3/8	1.83	0.93	1.00	1.11	0.50	100
DB201201F-261	2/0 AWG	325/24 2/0 Weld	1/2	2.08	0.93	1.00	1.11	0.50	100
DB201243F-261	2/0 AWG	325/24 2/0 Weld	1/2	2.83	0.93	1.75	1.11	0.50	100
LB201458F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.41	0.85	0.63	1.79	0.45	100
LB201434F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.53	0.85	0.75	1.79	0.45	100
LB205601F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.78	0.85	1.00	1.79	0.45	100
LB203801F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.84	0.85	1.00	1.79	0.45	100

Two hole 45°

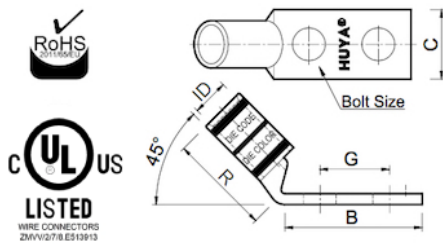

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13
Celestra	A45	Black	45

Cat. Nos	Wire Size		Dimension (in.)							Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
LB201201F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.09	0.85	1.00	1.79	0.45	100	
LB201243F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.01	0.85	1.75	1.79	0.45	100	
LB201458FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.41	0.85	0.63	1.79	0.45	100	
LB201434FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.53	0.85	0.75	1.79	0.45	100	
LB205601FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.78	0.85	1.00	1.79	0.45	100	
LB203801FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.84	0.85	1.00	1.79	0.45	100	
LB201201FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.09	0.85	1.00	1.79	0.45	100	
LB201243FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.01	0.85	1.75	1.79	0.45	100	
LB201243F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.83	0.83	1.75	1.80	0.44	100	
LB201458F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.26	0.83	0.62	1.80	0.44	100	
LB201434F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.39	0.83	0.75	1.80	0.44	100	
LB203801F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.83	0.83	1.00	1.80	0.44	100	
LB201243FP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.83	0.83	1.75	1.80	0.44	100	
LB201458FP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.26	0.83	0.62	1.80	0.44	100	
LB201434FP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.39	0.83	0.75	1.80	0.44	100	
LB203801FP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.83	0.83	1.00	1.80	0.44	100	
LB201458FP-251	2/0 AWG	325/24 2/0 Weld	1/4	1.41	0.96	0.63	1.80	0.51	100	
LB201434FP-251	2/0 AWG	325/24 2/0 Weld	1/4	1.53	0.96	0.75	1.80	0.51	100	
LB203801FP-251	2/0 AWG	325/24 2/0 Weld	3/8	1.84	0.96	1.00	1.80	0.51	100	
LB201243FP-251	2/0 AWG	325/24 2/0 Weld	1/2	3.01	0.96	1.75	1.80	0.51	100	
LB201458FP-261	2/0 AWG	325/24 2/0 Weld	1/4	1.27	0.93	0.63	1.80	0.50	100	
LB201434FP-261	2/0 AWG	325/24 2/0 Weld	1/4	1.39	0.93	0.75	1.80	0.50	100	
LB203801FP-261	2/0 AWG	325/24 2/0 Weld	3/8	1.83	0.93	1.00	1.80	0.50	100	
LB201243FP-261	2/0 AWG	325/24 2/0 Weld	1/2	2.83	0.93	1.75	1.80	0.50	100	