


Two hole 45°

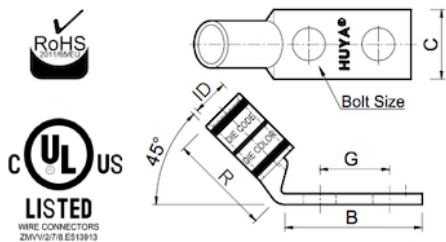

Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14	Green	94
Panduit	CT-920 CT-980	Green	P94
Burndy	Y35 Y45	Green	22
Celestra	A45	Green	94

Cat. Nos	Wire Size		Dimension (in.)							Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
DB613801F	600kcmil	1100/24 = 444 kcmil	3/8	0.00	1.93	1.00	2.29	0.96	100	
DB611243F	600kcmil	1100/24 = 444 kcmil	1/2	0.00	3.00	1.75	2.29	0.96	100	
LB613801F	600kcmil	1100/24 = 444 kcmil	3/8	0.00	2.80	1.00	3.14	0.96	100	
LB611243F	600kcmil	1100/24 = 444 kcmil	1/2	0.00	3.00	1.75	3.14	0.96	100	
DB613801F-250	600 kcmil	1100/24 = 444 kcmil	3/8	1.82	1.70	1.00	2.49	0.92	100	
DB611243F-250	600 kcmil	1100/24 = 444 kcmil	1/2	3.01	1.70	1.75	2.49	0.92	100	
DB611243F-260	600 kcmil	1100/24 = 444 kcmil	1/2	2.83	1.74	1.75	2.12	0.93	100	
DB613801F-260	600 kcmil	1100/24 = 444 kcmil	3/8	1.83	1.73	1.00	2.12	0.93	100	
LB613801F-250	600 kcmil	1100/24 = 444 kcmil	3/8	1.82	1.70	1.00	3.43	0.92	100	
LB611243F-250	600 kcmil	1100/24 = 444 kcmil	1/2	3.01	1.70	1.75	3.43	0.92	100	
LB613801FP-250	600 kcmil	1100/24 = 444 kcmil	3/8	1.82	1.70	1.00	3.43	0.92	100	
LB611243FP-250	600 kcmil	1100/24 = 444 kcmil	1/2	3.01	1.70	1.75	3.43	0.92	100	
LB611243F-260	600 kcmil	1100/24 = 444 kcmil	1/2	2.83	1.69	1.75	3.43	0.93	100	
LB613801F-260	600 kcmil	1100/24 = 444 kcmil	3/8	1.83	1.74	1.00	3.43	0.93	100	
LB611243FP-260	600 kcmil	1100/24 = 444 kcmil	1/2	2.83	1.74	1.75	3.43	0.93	100	
LB613801FP-260	600 kcmil	1100/24 = 444 kcmil	3/8	2.08	1.74	1.00	3.43	0.93	100	
DB611243F-251	600 kcmil	535.3 kcmil 1325/24 500 kcmil	1/2	3.01	1.89	1.75	2.22	1.03	100	
DB611243F-261	600 kcmil	535.3 kcmil 1325/24 500 kcmil	1/2	2.83	1.91	1.75	2.16	1.03	100	