


Two hole 45°

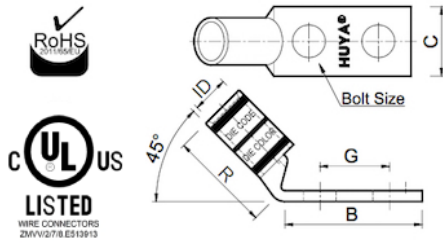

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-980	Black	P106
Burndy	Y35 Y45	Black	24
Celestra	A45	Black	106

Cat. Nos	Wire Size		Dimension (in.)							Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
DB753801F	750kcmil	—	3/8	2.80	1.94	1.00	2.37	1.06	100	
DB751243F	750kcmil	—	1/2	3.00	1.94	1.75	2.37	1.06	100	
LB753801F	750kcmil	—	3/8	2.06	1.94	1.00	3.24	1.06	100	
LB753801FP	750kcmil	—	3/8	2.06	1.94	1.00	3.24	1.06	100	
LB751243F	750kcmil	—	1/2	3.00	1.94	1.75	3.24	1.06	100	
DB753881F-260	750 kcmil	—	3/8	1.96	1.91	1.12	2.26	1.03	100	
DB751243F-260	750 kcmil	—	1/2	2.83	1.89	1.75	2.26	1.03	100	
DB751221F-260	750 kcmil	—	1/2	2.58	1.89	1.50	2.26	1.03	100	
DB753801F-260	750 kcmil	—	3/8	1.83	1.89	1.00	2.26	1.03	100	
DB755821F-260	750 kcmil	—	5/8	2.83	1.89	1.50	2.26	1.03	100	
WP751243F-072	750 kcmil	—	1/2	2.78	1.90	1.75	2.26	1.03	100	
WP753801F-175	750 kcmil	—	3/8	2.05	1.90	1.00	2.26	1.03	100	
LB751243F-260	750 kcmil	—	1/2	2.83	1.89	1.75	3.72	1.03	100	
LB753801F-260	750 kcmil	—	3/8	1.83	1.91	1.00	3.72	1.03	100	
LB751243FP-260	750 kcmil	—	1/2	2.83	1.91	1.75	3.72	1.03	100	
LB753801FP-260	750 kcmil	—	3/8	2.08	1.91	1.00	3.72	1.03	100	
LB751243F-241	750 kcmil	1325/24 = 535 kcmil	1/2	3.00	1.94	1.75	3.24	1.06	100	