


COMPRESSION CONNECTORS

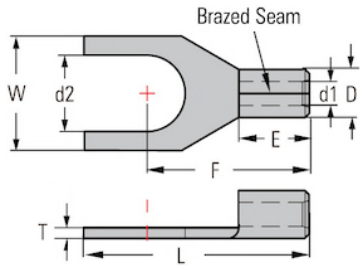

Cat. Nos	Application for Cable Size			Dimension(mm)									Std. Pkg.
	Stud(Metric)	mm ²	A.W.G Stripped Length(mm)	E	L	T	F	W	d1	d2	D		
DS2203BS	3	0.5-1.5	22-16	6.00	5	13.6	0.75	11.00	6	1.7	3.3	3.4	100
DS2235BS	3.5	0.5-1.5	22-16	6.00	5	13.6	0.75	11.00	6	1.7	3.8	3.4	100
DS2204BS	4	0.5-1.5	22-16	6.00	5	15.6	0.75	12.00	6.8	1.7	4.4	3.4	100
DS2204LBS	4	0.5-1.5	22-16	6.00	5	15.6	0.75	12.00	8	1.7	4.4	3.4	100
DS2205BS	5	0.5-1.5	22-16	6.00	5	17.6	0.75	13.00	10	1.7	5.4	3.4	100
DS2206BS	6	0.5-1.5	22-16	6.00	5	20.2	0.75	15.00	11	1.7	6.6	3.4	100
DS1603BS	3	1.5--2.5	16-14	6.00	5	13.6	0.8	13.00	6	2.3	3.3	4	100
DS1635BS	3.5	1.5--2.5	16-14	6.00	5	13.6	0.8	11.00	6	2.3	3.8	4	100
DS1604BS	4	1.5--2.5	16-14	6.00	5	15.6	0.8	12.00	6.8	2.3	4.4	4	100
DS1604LBS	4	1.5--2.5	16-14	6.00	5	15.6	0.8	12.00	8	2.3	4.4	4	100
DS1605BS	5	1.5--2.5	16-14	6.00	5	18.6	0.8	14.00	10	2.3	5.4	4	100
DS1606BS	6	1.5--2.5	16-14	6.00	5	21.2	0.8	16.00	11	2.3	6.6	4	100
DS1204BS	4	4--6	12-10	7.00	6	17.2	1	14.00	8	3.4	4.4	5.5	100
DS1205BS	5	4--6	12-10	7.00	6	19.4	1	15.00	10	3.4	5.4	5.5	100
DS1206BS	6	4--6	12-10	7.00	6	21.2	1	16.00	11	3.4	6.6	5.5	100
DS1208BS	8	4--6	12-10	7.00	6	25.6	1	19.00	14	3.4	8.5	5.5	100
DS1210BS	10	4--6	12-10	7.00	6	28.6	1	21.00	18	3.4	10.5	5.5	100