


Two - Holes Stand Barrel

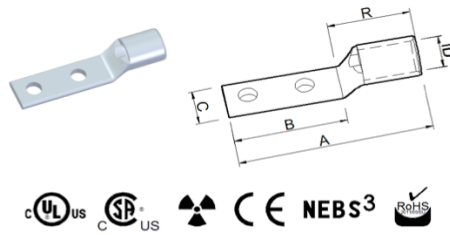

Cat. Nos	Wire Size		Bolt Size	Dimension (in.)						ID	Std. Pkg.
	Code	Flex Class G,H,I,K,M		A	B	C	G	R			
DB021058-250N	#2 AWG	—	#10	1.98	1.15	0.48	0.63	0.88	0.30	100	
DB021458-260N	#2 AWG	—	1/4	2.48	1.26	0.48	0.63	1.13	0.30	100	
DB021434-260N	#2 AWG	—	1/4	2.61	1.39	0.48	0.75	1.13	0.30	100	
DB021401-260N	#2 AWG	—	1/4	2.86	1.64	0.48	1.00	1.13	0.30	100	
DB021458N	#2 AWG	—	1/4	2.13	1.19	0.41	0.63	0.85	0.30	100	
DB021434N	#2 AWG	#60 Navy	1/4	2.25	1.31	0.41	0.75	0.85	0.30	100	
DB021401N	#2 AWG	#4 Weld	1/4	2.50	1.56	0.41	1.00	0.85	0.30	100	
DB021058N	#2 AWG	125/24	#10	2.13	1.19	0.41	0.63	0.85	0.30	100	
DB021458-250N	#2 AWG	—	1/4	2.48	1.26	0.42	0.63	1.13	0.31	100	
DB021434-250N	#2 AWG	—	1/4	2.60	1.38	0.42	0.75	1.13	0.31	100	
DB021401-250N	#2 AWG	—	1/4	2.85	1.63	0.42	1.00	1.13	0.31	100	
DB021058-261N-1	#2 AWG	—	#10	2.28	1.15	0.47	0.63	1.13	0.36	100	
DB021434-251N	#2 AWG	—	1/4	2.22	1.38	0.47	0.75	0.84	0.36	100	
DB021458-251N	#2 AWG	—	1/4	2.10	1.26	0.47	0.63	0.84	0.36	100	
DB021058-261N	#2 AWG	—	#10	2.12	1.15	0.46	0.63	0.88	0.36	100	
DB021401-261N	#2 AWG	—	1/4	2.62	1.65	0.46	1.00	0.88	0.36	100	
DB021458-261N	#2 AWG	—	1/4	2.25	1.28	0.46	0.63	0.88	0.36	100	