


Metric connectors for copper conductor

One - Hole

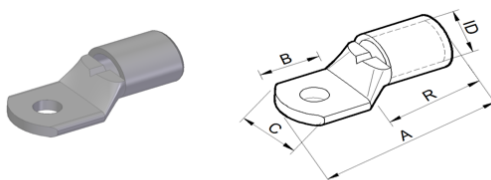

Cat. Nos	Conduct Size sq.mm				Stud	Dimensions mm					Std. Pkg.
	Stranded	Flexible	2r	5f / 6f		A	B	C	R	ID	
J08AN0808	8	-	-	-	—	1.15	0.48	0.41	0.18	0.18	100
J08AN0810	8	-	-	-	—	1.11	0.44	0.41	0.18	0.18	100
J08AN0814	8	-	-	-	—	1.17	0.50	0.45	0.18	0.18	100
J08AN0856	8	-	-	-	—	1.29	0.62	0.56	0.18	0.18	100
J08AN0838	8	-	-	-	—	1.29	0.62	0.56	0.18	0.18	100
J06AN0610	6	-	-	-	—	1.30	0.52	0.49	0.20	0.22	100
J06AN0614	6	-	-	-	—	1.30	0.52	0.49	0.20	0.22	100
J06AN0656	6	-	-	-	—	1.42	0.64	0.60	0.20	0.22	100
J06AN0638	6	-	-	-	—	1.42	0.64	0.60	0.20	0.22	100
J04AN0410	4	-	-	-	—	1.37	0.57	0.55	0.25	0.27	100
J04AN0414	4	-	-	-	—	1.37	0.57	0.55	0.25	0.27	100
J04AN0456	4	-	-	-	—	1.45	0.65	0.62	0.25	0.27	100
J04AN0438	4	-	-	-	—	1.45	0.65	0.62	0.25	0.27	100
J02AN0110	2	-	-	-	—	1.57	0.71	0.70	0.25	0.36	100
J02AN0114	2	-	-	-	—	1.57	0.71	0.70	0.25	0.36	100
J02AN0156	2	-	-	-	—	1.57	0.71	0.70	0.25	0.36	100
J02AN0138	2	-	-	-	—	1.71	0.85	0.70	0.25	0.36	100
J02AN0176	2	-	-	-	—	1.75	0.89	0.77	0.25	0.36	100
J02AN0112	2	-	-	-	—	1.71	0.85	0.77	0.25	0.36	100
J01AN1014	1AN-1/0	-	-	-	—	1.76	0.85	0.77	0.28	0.40	100
J01AN1056	1AN-1/0	-	-	-	—	1.85	0.94	0.77	0.28	0.40	100
J01AN1038	1AN-1/0	-	-	-	—	1.85	0.94	0.77	0.28	0.40	100
J01AN1076	1AN-1/0	-	-	-	—	1.76	0.85	0.77	0.28	0.40	100
J01AN1012	1/0	-	-	-	—	1.76	0.85	0.77	0.28	0.40	100
J10AN2014	1/0AN-2/0	-	-	-	—	1.93	0.94	0.84	0.30	0.44	100
J10AN2056	1/0AN-2/0	-	-	-	—	1.91	0.92	0.84	0.30	0.44	100
J10AN2038	1/0AN-2/0	-	-	-	—	1.91	0.92	0.84	0.30	0.44	100
J10AN2076	1/0AN-2/0	-	-	-	—	1.93	0.94	0.89	0.30	0.44	100
J10AN2012	1/0AN-2/0	-	-	-	—	1.93	0.94	0.89	0.30	0.44	100
J10AN2058	2/0	-	-	-	—	1.93	0.94	0.89	0.30	0.44	100
J20AN3014	2/0AN-3/0	-	-	-	—	2.07	0.93	0.95	0.32	0.51	100
J20AN3056	2/0AN-3/0	-	-	-	—	2.07	0.93	0.95	0.32	0.51	100
J20AN3038	2/0AN-3/0	-	-	-	—	2.12	0.98	0.95	0.32	0.51	100
J20AN3076	2/0AN-3/0	-	-	-	—	2.12	0.98	0.95	0.32	0.51	100
J20AN3012	3/0	-	-	-	—	2.12	0.98	0.95	0.32	0.51	100
J30AN4056	3/0AN-4/0	-	-	-	—	2.16	1.02	1.04	0.32	0.56	100
J30AN4038	3/0AN-4/0	-	-	-	—	2.17	1.03	1.04	0.32	0.56	100
J30AN4076	3/0AN-4/0	-	-	-	—	2.17	1.03	1.04	0.32	0.56	100
J30AN4012	4/0	-	-	-	—	2.17	1.03	1.04	0.32	0.56	100
J40AN2514	4/0AN-250MCM	-	-	-	—	2.44	1.13	1.14	0.35	0.63	100
J40AN2556	4/0AN-250MCM	-	-	-	—	2.44	1.13	1.14	0.35	0.63	100
J40AN2538	4/0AN-250MCM	-	-	-	—	2.44	1.13	1.14	0.35	0.63	100
J40AN2576	4/0AN-250MCM	-	-	-	—	2.55	1.24	1.14	0.35	0.63	100
J40AN2512	250MCM	-	-	-	—	2.55	1.24	1.14	0.35	0.63	100