



Metric connectors for copper conductor

One - Hole

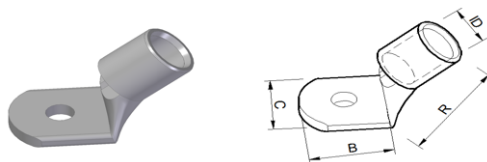

Cat. Nos	Conduct Size sq.mm				Dimensions mm					Std. Pkg.
	Stranded	Flexible	2r	5f / 6f	Stud	B	C	R	ID	
J08AN0814F	8	-	-	-	—	0.50	0.45	0.18	0.18	100
J08AN0856F	8	-	-	-	—	0.62	0.56	0.18	0.18	100
J08AN0838F	8	-	-	-	—	0.62	0.56	0.18	0.18	100
J06AN0610F	6	-	-	-	—	0.52	0.49	0.20	0.22	100
J06AN0614F	6	-	-	-	—	0.52	0.49	0.20	0.22	100
J06AN0656F	6	-	-	-	—	0.64	0.60	0.20	0.22	100
J06AN0638F	6	-	-	-	—	0.64	0.60	0.20	0.22	100
J04AN0410F	4	-	-	-	—	0.57	0.55	0.25	0.27	100
J04AN0414F	4	-	-	-	—	0.57	0.55	0.25	0.27	100
J04AN0456F	4	-	-	-	—	0.65	0.62	0.25	0.27	100
J04AN0438F	4	-	-	-	—	0.65	0.62	0.25	0.27	100
J02AN0110F	2	-	-	-	—	0.71	0.70	0.25	0.36	100
J02AN0114F	2	-	-	-	—	0.71	0.70	0.25	0.36	100
J02AN0156F	2	-	-	-	—	0.71	0.70	0.25	0.36	100
J02AN0138F	2	-	-	-	—	0.85	0.70	0.25	0.36	100
J02AN0176F	2	-	-	-	—	0.89	0.77	0.25	0.36	100
J02AN0112F	2	-	-	-	—	0.85	0.77	0.25	0.36	100
J01AN1014F	1AN-1/0	-	-	-	—	0.85	0.77	0.28	0.40	100
J01AN1056F	1AN-1/0	-	-	-	—	0.94	0.77	0.28	0.40	100
J01AN1038F	1AN-1/0	-	-	-	—	0.94	0.77	0.28	0.40	100
J01AN1076F	1AN-1/0	-	-	-	—	0.85	0.77	0.28	0.40	100
J01AN1012F	1/0	-	-	-	—	0.85	0.77	0.28	0.40	100
J10AN2014F	1/0AN-2/0	-	-	-	—	0.94	0.84	0.30	0.44	100
J10AN2056F	1/0AN-2/0	-	-	-	—	0.92	0.84	0.30	0.44	100
J10AN2038F	1/0AN-2/0	-	-	-	—	0.92	0.84	0.30	0.44	100
J10AN2076F	1/0AN-2/0	-	-	-	—	0.94	0.89	0.30	0.44	100
J10AN2012F	1/0AN-2/0	-	-	-	—	0.94	0.89	0.30	0.44	100
J10AN2058F	2/0	-	-	-	—	0.94	0.89	0.30	0.44	100
J20AN3014F	2/0AN-3/0	-	-	-	—	0.93	0.95	0.32	0.51	100
J20AN3056F	2/0AN-3/0	-	-	-	—	0.93	0.95	0.32	0.51	100
J20AN3038F	2/0AN-3/0	-	-	-	—	0.98	0.95	0.32	0.51	100
J20AN3076F	2/0AN-3/0	-	-	-	—	0.98	0.95	0.32	0.51	100
J20AN3012F	3/0	-	-	-	—	0.98	0.95	0.32	0.51	100
J30AN4056F	3/0AN-4/0	-	-	-	—	1.02	1.04	0.32	0.56	100
J30AN4038F	3/0AN-4/0	-	-	-	—	1.03	1.04	0.32	0.56	100
J30AN4076F	3/0AN-4/0	-	-	-	—	1.03	1.04	0.32	0.56	100
J30AN4012F	4/0	-	-	-	—	1.03	1.04	0.32	0.56	100

Metric connectors for copper conductor
One - Hole

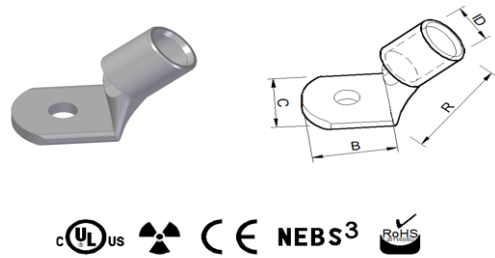

Cat. Nos	Conduct Size sq.mm				Dimensions mm					Std. Pkg.
	Stranded	Flexible	2r	5f / 6f	Stud	B	C	R	ID	
J40AN2514F	250MCM	-	-	-	—	1.13	1.14	0.35	0.63	100
J40AN2556F	250MCM	-	-	-	—	1.13	1.14	0.35	0.63	100
J40AN2538F	250MCM	-	-	-	—	1.13	1.14	0.35	0.63	100
J40AN2574F	250MCM	-	-	-	—	1.24	1.14	0.35	0.63	100
J40AN2512F	250MCM	-	-	-	—	1.24	1.14	0.35	0.63	100