


One - Hole

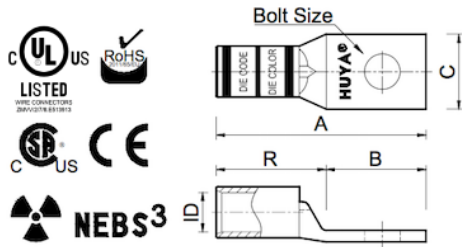


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13
Celestra	A45	Black	45

Cat. Nos	Wire Size		Dimension (in.)					ID	Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R		
DA2014	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.65	0.65	0.83	1.00	0.44	100
DA2056	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.88	0.88	0.83	1.00	0.44	100
DA2038	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.93	0.93	0.83	1.00	0.44	100
DA2012	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.25	1.25	0.83	1.00	0.44	100
DA2058	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/8	2.50	1.50	0.83	1.00	0.44	100
DA2014-250	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.06	0.78	0.85	1.28	0.45	100
DA2056-250	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	2.06	0.78	0.85	1.28	0.45	100
DA2038-250	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	2.12	0.84	0.85	1.28	0.45	100
DA2012-250	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.37	1.09	0.85	1.28	0.45	100
DA2014-260	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.88	0.64	0.83	1.24	0.44	100
DA2056-260	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.94	0.70	0.83	1.24	0.44	100
DA2038-260	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	2.07	0.83	0.83	1.24	0.44	100
DA2034-260	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/4	2.76	1.52	0.96	1.24	0.44	100
DA2012-260	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.32	1.08	0.83	1.24	0.44	100
DA2058-260	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/8	2.57	1.33	0.88	1.24	0.44	100
DA2056-262	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.94	0.70	0.62	1.24	0.44	100
DA2010-251	2/0AWG	325/24 2/0 Weld	#10	1.67	0.78	0.96	1.13	0.51	100
DA2014-251	2/0AWG	325/24 2/0 Weld	1/4	1.91	0.78	0.96	1.13	0.51	100
DA2056-251	2/0AWG	325/24 2/0 Weld	5/16	1.91	0.78	0.96	1.13	0.51	100
DA2038-251	2/0AWG	325/24 2/0 Weld	3/8	1.97	0.84	0.96	1.13	0.51	100
DA2012-251	2/0AWG	325/24 2/0 Weld	1/2	2.22	1.09	0.96	1.13	0.51	100
DA2058-251	2/0AWG	325/24 2/0 Weld	5/8	2.46	1.33	0.96	1.13	0.51	100
DA2034-251	2/0AWG	325/24 2/0 Weld	3/4	2.65	1.52	0.96	1.13	0.51	100
DA2014-252	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.80	0.78	0.85	1.02	0.45	100

One - Hole

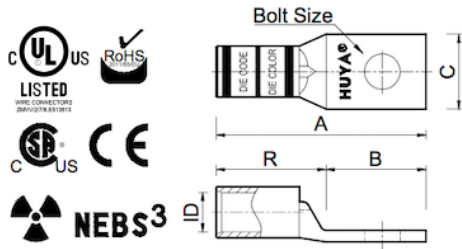


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13
Celestra	A45	Black	45

Cat. Nos	Wire Size		Dimension (in.)						Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	
DA2056-252	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.80	0.78	0.85	1.02	0.45	100
DA2038-252	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.86	0.84	0.85	1.02	0.45	100
DA2012-252	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.11	1.09	0.85	1.02	0.45	100
DA2010-261	2/0AWG	325/24 2/0 Weld	#10	1.63	0.52	0.93	1.11	0.50	100
DA2012-261	2/0AWG	325/24 2/0 Weld	1/2	2.19	1.08	0.93	1.11	0.50	100
DA2014-261	2/0AWG	325/24 2/0 Weld	1/4	1.75	0.64	0.93	1.11	0.50	100
DA2034-261	2/0AWG	325/24 2/0 Weld	3/4	2.63	1.52	1.10	1.11	0.50	100
DA2038-261	2/0AWG	325/24 2/0 Weld	3/8	1.94	0.83	0.93	1.11	0.50	100
DA2056-261	2/0AWG	325/24 2/0 Weld	5/16	1.81	0.70	0.93	1.11	0.50	100
DA2058-261	2/0AWG	325/24 2/0 Weld	5/8	2.44	1.33	0.93	1.11	0.50	100
WP2038-010	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.96	0.81	0.83	1.00	0.44	100
WP2056-129	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.96	0.81	0.83	1.00	0.44	100
WP2012-144	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.06	0.81	0.83	1.00	0.44	100
WP2058-145	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/8	2.25	0.81	0.89	1.00	0.44	100
WP2014-188	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.96	0.81	0.83	1.00	0.44	100
LA2038	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	2.28	0.93	0.83	1.35	0.44	100
LA2012	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.60	1.25	0.83	1.35	0.44	100
LA2038-250	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	2.63	0.84	0.85	1.79	0.45	100
LA2012-250	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.88	1.09	0.85	1.79	0.45	100
LA2038-260	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	2.63	0.83	0.83	1.80	0.44	100
LA2012-260	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.88	1.08	0.83	1.80	0.44	100
LA2014P-260	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.44	0.64	0.83	1.80	0.44	100
LA2038P-260	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	2.63	0.83	0.83	1.80	0.44	100
LA2014P-251	2/0AWG	325/24 2/0 Weld	1/4	2.58	0.78	0.96	1.80	0.51	100
LA2038P-251	2/0AWG	325/24 2/0 Weld	3/8	2.64	0.84	0.96	1.80	0.51	100
LA2012P-251	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.89	1.09	0.96	1.80	0.51	100

HUYA®

One - Hole

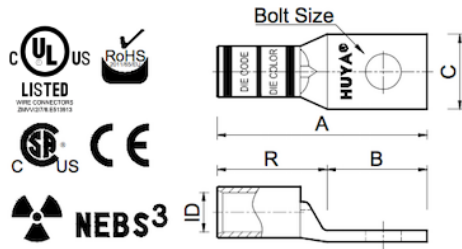

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13
Celestra	A45	Black	45

Cat. Nos	Wire Size		Dimension (in.)						Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	
LA2014P-261	2/0AWG	325/24 2/0 Weld	1/4	2.44	0.64	0.93	1.80	0.50	100
LA2038P-261	2/0AWG	325/24 2/0 Weld	3/8	2.63	0.83	0.93	1.80	0.50	100
LA2012P-261	2/0AWG	325/24 2/0 Weld	1/2	2.88	1.08	0.93	1.80	0.50	100