


Two hole 45°

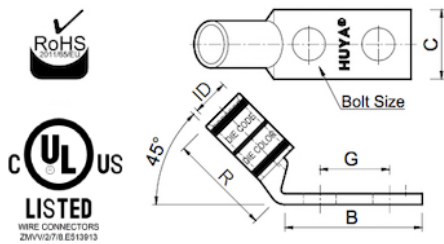


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7
Celestra	A45	Blue	24

Cat. Nos	Wire Size		Dimension (in.)							Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID		
DB061458F	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.28	0.44	0.63	0.70	0.22	100	
DB061401F	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.56	0.43	1.00	0.70	0.22	100	
LB061458F	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.28	0.44	0.63	1.00	0.22	100	
LB061401F	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.63	0.43	1.00	1.00	0.22	100	
LB061434F	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.43	0.43	0.75	1.00	0.22	100	
LB063801F	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.93	0.59	1.00	1.00	0.22	100	
LB061243F	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	3.00	0.88	1.75	1.00	0.22	100	
DB061058F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.17	0.46	0.63	1.01	0.22	100	
DB061034F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.29	0.46	0.75	1.01	0.22	100	
DB061001F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.54	0.46	1.00	1.01	0.22	100	
DB061458F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.63	1.01	0.22	100	
DB061434F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.75	1.01	0.22	100	
DB061401F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	1.00	1.01	0.22	100	
DB065601F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.74	0.56	1.00	1.01	0.22	100	
DB063801F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	1.00	1.01	0.22	100	
DB061458F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.45	0.62	1.01	0.22	100	
DB061243F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.81	1.75	1.01	0.22	100	
DB061058F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.15	0.42	0.62	1.01	0.22	100	
DB061412F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.14	0.45	0.50	1.01	0.22	100	
DB061401F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.45	1.00	1.01	0.22	100	
DB061434F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.44	0.75	1.01	0.22	100	
DB063801F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.63	1.00	1.01	0.22	100	
DB061012F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.02	0.42	0.50	1.01	0.22	100	
DB065601F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.70	0.52	1.00	1.01	0.22	100	
DB065634F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.45	0.52	0.75	1.01	0.22	100	
DB061058F-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.17	0.46	0.63	0.68	0.22	100	
DB061034F-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.29	0.46	0.75	0.68	0.22	100	
DB061021F-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.04	0.46	1.50	0.68	0.22	100	
DB061069F-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.23	0.46	0.69	0.68	0.22	100	
DB061458F-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.63	0.68	0.22	100	
DB061434F-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.75	0.68	0.22	100	
DB061401F-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	1.00	0.68	0.22	100	
DB065601F-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.74	0.56	1.00	0.68	0.22	100	
DB063801F-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	1.00	0.68	0.22	100	
DB061058F-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.15	0.44	0.62	0.70	0.22	100	
DB061034F-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.27	0.48	0.75	0.70	0.22	100	
DB061016F-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.21	0.44	0.69	0.70	0.22	100	
DB061012F-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.02	0.48	0.50	0.70	0.22	100	
DB061458F-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.48	0.62	0.70	0.22	100	
DB061434F-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.48	0.75	0.70	0.22	100	
DB061401F-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.48	1.00	0.70	0.22	100	
DB065601F-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.70	0.52	1.00	0.70	0.22	100	
DB063801F-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.58	1.00	0.70	0.22	100	
DB061243F-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.83	1.75	0.70	0.22	100	
WP061401F-113	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.15	0.44	1.00	0.65	0.21	100	
LB061058F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.17	0.46	0.63	1.27	0.22	100	
LB061458F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.63	1.27	0.22	100	
LB061434F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.75	1.27	0.22	100	
LB061401F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	1.00	1.27	0.22	100	
LB063801F-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	1.00	1.27	0.22	100	

Two hole 45°

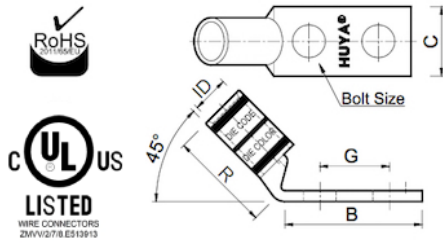

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7
Celestra	A45	Blue	24

Cat. Nos	Wire Size		Dimension (in.)						
	Code	Flex Class G,H,I,K,M	Bolt Size	B	C	G	R	ID	Std. Pkg.
LB061058FP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.17	0.46	0.63	1.27	0.22	100
LB061034FP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.29	0.46	0.75	1.27	0.22	100
LB061412FP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.12	0.48	0.50	1.27	0.22	100
LB061458FP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.63	1.27	0.22	100
LB061434FP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.75	1.27	0.22	100
LB061401FP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	1.00	1.27	0.22	100
LB061441FP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.87	0.48	1.25	1.27	0.22	100
LB065634FP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.49	0.56	0.75	1.27	0.22	100
LB063834FP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.59	0.62	0.75	1.27	0.22	100
LB063878FP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.72	0.62	0.88	1.27	0.22	100
LB063801FP-250	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	1.00	1.27	0.22	100
LB061243F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.81	1.75	1.32	0.22	100
LB061458F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.45	0.62	1.32	0.22	100
LB061401F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.45	1.00	1.32	0.22	100
LB061434F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.45	0.75	1.32	0.22	100
LB063801F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.63	1.00	1.32	0.22	100
LB063834F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.58	0.63	0.75	1.32	0.22	100
LB063878F-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.71	0.63	0.88	1.32	0.22	100
LB061243FP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.83	1.75	1.32	0.22	100
LB061034FP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.27	0.42	0.75	1.32	0.22	100
LB061458FP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.45	0.62	1.32	0.22	100
LB061434FP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.45	0.75	1.32	0.22	100
LB061401FP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.45	1.00	1.32	0.22	100
LB063834FP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.58	0.58	0.75	1.32	0.22	100
LB063878FP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.71	0.58	=7/8	1.32	0.22	100
LB063801FP-260	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.58	1.00	1.32	0.22	100
LB061034FP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.29	0.46	0.75	1.27	0.22	100
LB061458FP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.63	1.27	0.22	100
LB061434FP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.75	1.27	0.22	100
LB061401FP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	1.00	1.27	0.22	100
LB063858FP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.47	0.62	0.63	1.27	0.22	100
LB063878FP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.72	0.62	0.88	1.27	0.22	100
LB063801FP-251	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	1.00	1.27	0.22	100
LB061034FP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.27	0.48	0.75	0.95	0.22	100
LB061458FP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.27	0.48	0.63	0.95	0.22	100
LB061434FP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.48	0.75	0.95	0.22	100
LB061401FP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.48	1.00	0.95	0.22	100
LB063801FP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.58	1.00	0.95	0.22	100
LB063834FP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.58	0.58	0.75	0.95	0.22	100
LB063878FP-261	6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.71	0.58	0.88	0.95	0.22	100