


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13
Celestra	A45	Black	45

Cat. Nos	Wire Size		Dimension (in.)							ID	Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R			
DB201434	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.44	1.44	0.83	0.75	1.00	0.44	100	
DB205678	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	2.63	1.63	0.83	0.88	1.00	0.44	100	
DB205601	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	2.81	1.81	0.83	1.00	1.00	0.44	100	
DB203801	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	2.93	1.93	0.83	1.00	1.00	0.44	100	
DB201243	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.81	2.81	0.83	1.75	1.00	0.44	100	
LB201458	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.60	1.25	0.83	0.63	1.35	0.44	100	
LB201434	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.66	1.31	0.81	0.75	1.35	0.44	100	
LB203801	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.16	1.81	0.83	1.00	1.35	0.44	100	
LB203801P	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.16	1.81	0.83	1.00	1.35	0.44	100	
LB201243	2/0AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.16	2.81	0.83	1.75	1.35	0.44	100	
DB201458-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.69	1.41	0.85	0.63	1.28	0.45	100	
DB201434-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.81	1.53	0.85	0.75	1.28	0.45	100	
DB205678-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	2.94	1.66	0.85	0.88	1.28	0.45	100	
DB203801-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.12	1.84	0.85	1.00	1.28	0.45	100	
DB201243-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.29	3.01	0.85	1.75	1.28	0.45	100	
DB205678-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	2.82	1.58	0.83	0.88	1.24	0.44	100	
DB201243-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.07	2.83	0.83	1.75	1.24	0.44	100	
DB201458-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.51	1.27	0.83	0.63	1.24	0.44	100	
DB201401-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.88	1.64	0.83	1.00	1.24	0.44	100	
DB201434-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.63	1.39	0.83	0.75	1.24	0.44	100	
DB203801-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.07	1.83	0.83	1.00	1.24	0.44	100	
DB201458-251	2/0 AWG	325/24 2/0 Weld	1/4	2.54	1.64	0.96	0.63	1.13	0.51	100	
DB201434-251	2/0 AWG	325/24 2/0 Weld	1/4	2.66	1.76	0.96	0.75	1.13	0.51	100	
DB205601-251	2/0 AWG	325/24 2/0 Weld	5/16	2.91	2.01	0.96	1.00	1.13	0.51	100	
DB203801-251	2/0 AWG	325/24 2/0 Weld	3/8	2.97	2.03	0.96	1.00	1.13	0.51	100	
DB201201-251	2/0 AWG	325/24 2/0 Weld	1/2	3.22	2.17	0.96	1.00	1.13	0.51	100	
DB201243-251	2/0 AWG	325/24 2/0 Weld	1/2	4.14	2.96	0.96	1.75	1.13	0.51	100	
DB201458-261	2/0 AWG	325/24 2/0 Weld	1/4	2.38	1.27	0.93	0.63	1.11	0.50	100	
DB201434-261	2/0 AWG	325/24 2/0 Weld	1/4	2.50	1.39	0.93	0.75	1.11	0.50	100	
DB205601-261	2/0 AWG	325/24 2/0 Weld	5/16	2.81	1.70	0.93	1.00	1.11	0.50	100	
DB203801-261	2/0 AWG	325/24 2/0 Weld	3/8	2.94	1.83	0.93	1.00	1.11	0.50	100	
DB201201-261	2/0 AWG	325/24 2/0 Weld	1/2	3.19	2.08	0.93	1.00	1.11	0.50	100	
DB201243-261	2/0 AWG	325/24 2/0 Weld	1/2	3.94	2.83	0.93	1.75	1.11	0.50	100	
WP205601-013	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	3.02	1.81	0.83	1.00	1.00	0.44	100	
WP203801-057	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.02	1.81	0.83	1.00	1.00	0.44	100	

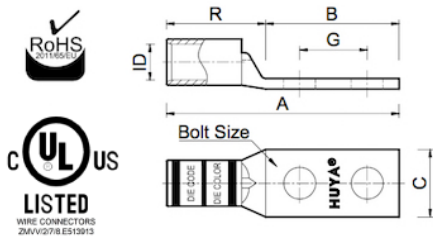

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13
Celestra	A45	Black	45

Cat. Nos	Wire Size		Dimension (in.)							ID	Std. Pkg.
	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R			
WP201434-130	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.77	1.56	0.83	0.75	1.00	0.44	100	
WP201201-142	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.07	1.81	0.83	1.00	1.00	0.44	100	
WP201243-143	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.82	2.56	0.83	1.75	1.00	0.44	100	
WP205678-173	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	2.93	1.63	0.83	0.88	1.00	0.44	100	
WP201458-180	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.65	1.44	0.83	0.63	1.00	0.44	100	
LB201458-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.21	1.41	0.85	0.63	1.79	0.45	100	
LB201434-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.33	1.53	0.85	0.75	1.79	0.45	100	
LB205601-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	3.58	1.78	0.85	1.00	1.79	0.45	100	
LB203801-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.64	1.84	0.85	1.00	1.79	0.45	100	
LB201201-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.89	2.09	0.85	1.00	1.79	0.45	100	
LB201243-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.81	3.01	0.85	1.75	1.79	0.45	100	
LB201458P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.21	1.41	0.85	0.63	1.79	0.45	100	
LB201434P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.33	1.53	0.85	0.75	1.79	0.45	100	
LB205601P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	3.58	1.78	0.85	1.00	1.79	0.45	100	
LB203801P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.64	1.84	0.85	1.00	1.79	0.45	100	
LB201201P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.89	2.09	0.85	1.00	1.79	0.45	100	
LB201243P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.81	3.01	0.85	1.75	1.79	0.45	100	
LB201243-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.63	2.83	0.83	1.75	1.80	0.44	100	
LB201458-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.07	1.27	0.83	0.63	1.80	0.44	100	
LB201434-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.19	1.39	0.83	0.75	1.80	0.44	100	
LB203801-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.63	1.83	0.83	1.00	1.80	0.44	100	
LB201243P-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.63	2.83	0.83	1.75	1.80	0.44	100	
LB201458P-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.07	1.27	0.83	0.63	1.80	0.44	100	
LB201434P-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.19	1.39	0.83	0.75	1.80	0.44	100	
LB203801P-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.63	1.83	0.83	1.00	1.80	0.44	100	
LB201458P-251	2/0 AWG	325/24 2/0 Weld	1/4	3.21	1.41	0.96	0.63	1.80	0.51	100	
LB201434P-251	2/0 AWG	325/24 2/0 Weld	1/4	3.33	1.53	0.96	0.75	1.80	0.51	100	
LB203801P-251	2/0 AWG	325/24 2/0 Weld	3/8	3.64	1.84	0.96	1.00	1.80	0.51	100	
LB201243P-251	2/0 AWG	325/24 2/0 Weld	1/2	4.81	3.01	0.96	1.75	1.80	0.51	100	
LB201458P-261	2/0 AWG	325/24 2/0 Weld	1/4	3.07	1.27	0.93	0.63	1.80	0.50	100	
LB201434P-261	2/0 AWG	325/24 2/0 Weld	1/4	3.19	1.39	0.93	0.75	1.80	0.50	100	
LB203801P-261	2/0 AWG	325/24 2/0 Weld	3/8	3.63	1.83	0.93	1.00	1.80	0.50	100	
LB201243P-261	2/0 AWG	325/24 2/0 Weld	1/2	4.63	2.83	0.93	1.75	1.80	0.50	100	