


COMPRESSION CONNECTORS

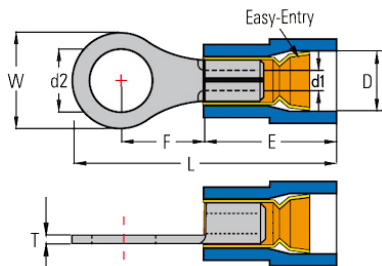

Cat. Nos	Application for Cable Size			Dimension(mm)									Std. Pkg.
	Stud(Metric)	mm ²	A.W.G Stripped Length(mm)	E	L	T	F	W	d1	d2	D		
RND2232	3	0.5-1.5	22-16	7.5-8.0	10.7	18.2	0.75	4.80	5.5	1.7	3.2	4.4	100
RND2237S	3.5	0.5-1.5	22-16	7.5-8.0	10.7	18.2	0.75	4.80	5.5	1.7	3.7	4.4	100
RND2237M	3.5	0.5-1.5	22-16	7.5-8.0	10.7	20.1	0.75	6.30	6.6	1.7	3.7	4.4	100
RND2237L	3.5	0.5-1.5	22-16	7.5-8.0	10.7	21.5	0.75	7.00	8	1.7	3.7	4.4	100
RND2204S	4	0.5-1.5	22-16	7.5-8.0	10.7	20.1	0.75	6.30	6.6	1.7	4.3	4.4	100
RND2204L	4	0.5-1.5	22-16	7.5-8.0	10.7	21.5	0.75	7.00	8	1.7	4.3	4.4	100
RND2205	5	0.5-1.5	22-16	7.5-8.0	10.7	21.5	0.75	7.00	8	1.7	5.3	4.4	100
RND2205L	5	0.5-1.5	22-16	7.5-8.0	10.7	27.4	0.75	11.00	11.8	1.7	5.3	4.4	100
RND2206	6	0.5-1.5	22-16	7.5-8.0	10.7	27.4	0.75	11.00	11.8	1.7	6.4	4.4	100
RND2208	8	0.5-1.5	22-16	7.5-8.0	10.7	27.4	0.75	11.00	11.8	1.7	8.4	4.4	100
RND2210	10	0.5-1.5	22-16	7.5-8.0	10.7	31.2	0.75	13.90	13.6	1.7	10.5	4.4	100
RND1632	3	1.5-2.5	16-14	7.5-8.0	10.7	18.5	0.8	4.70	6.6	2.3	3.2	5	100
RND1637S	3.5	1.5-2.5	16-14	7.5-8.0	10.7	18.5	0.8	4.70	6.6	2.3	3.7	5	100
RND1637M	3.5	1.5-2.5	16-14	7.5-8.0	10.7	20.2	0.8	6.30	6.6	2.3	3.7	5	100
RND1637L	3.5	1.5-2.5	16-14	7.5-8.0	10.7	22.5	0.8	7.40	8.5	2.3	3.7	5	100
RND1604S	4	1.5-2.5	16-14	7.5-8.0	10.7	20.2	0.8	6.30	6.6	2.3	4.3	5	100
RND1604L	4	1.5-2.5	16-14	7.5-8.0	10.7	22.5	0.8	7.80	8.5	2.3	4.3	5	100
RND1605S	5	1.5-2.5	16-14	7.5-8.0	10.7	22.5	0.8	7.80	8.5	2.3	5.3	5	100
RND1605L	5	1.5-2.5	16-14	7.5-8.0	10.7	22.7	0.8	7.30	9.6	2.3	5.3	5	100
RND1606	6	1.5-2.5	16-14	7.5-8.0	10.7	27.6	0.8	11.00	12	2.3	6.4	5	100
RND1608	8	1.5-2.5	16-14	7.5-8.0	10.7	27.6	0.8	11.00	12	2.3	8.4	5	100
RND1610	10	1.5-2.5	16-14	7.5-8.0	10.7	31.2	0.8	13.60	13.6	2.3	10.5	5	100
RND1237	3.5	4-6	12-10	8.5-9.0	13	22.7	1	6.10	7.2	3.4	3.7	7	100
RND1204S	4	4-6	12-10	8.5-9.0	13	22.7	1	6.10	7.2	3.4	4.3	7	100
RND1204L	4	4-6	12-10	8.5-9.0	13	26	1	8.30	9.5	3.4	4.3	7	100
RND1205	5	4-6	12-10	8.5-9.0	13	26	1	8.30	9.5	3.4	5.3	7	100
RND1206	6	4-6	12-10	8.5-9.0	13	29.5	1	10.50	12	3.4	6.4	7	100
RND1208	8	4-6	12-10	8.5-9.0	13	34	1	13.50	15	3.4	8.4	7	100
RND1210	10	4-6	12-10	8.5-9.0	13	34	1	13.50	15	3.4	10.5	7	100
RND1212	12	4-6	12-10	8.5-9.0	13	38.6	1	16.00	19.2	3.4	13	7	100