


COMPRESSION CONNECTORS

One - Hole Standard Barrel

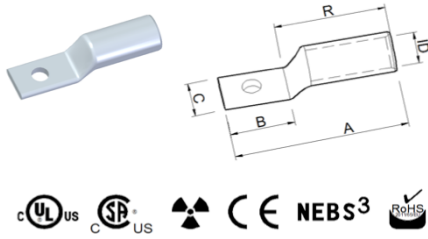


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Red	21
Panduit	CT-720 CT-920	Red	P21
Burndy	Y1MR Y2MR	Red	49
Celestra	A45	Red	21

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA0806-250N	#8 AWG	—	#6	1.32	0.52	0.27	0.74	0.18	100
DA0806-260N	#8 AWG	—	#6	1.09	0.41	0.27	0.62	0.18	100
DA0808-260N	#8 AWG	-	#8	1.15	0.47	0.29	0.62	0.18	100
DA0810-260N	#8 AWG	—	#10	1.20	0.52	0.29	0.62	0.18	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

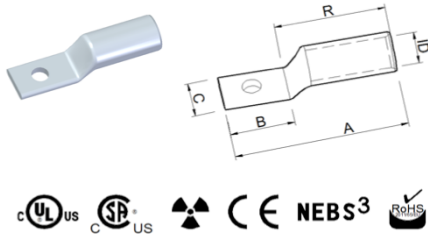


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7
Celestra	A45	Blue	24

Wire Size			Dimension (in.)						Std. Pkg.
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	
DA0606-250N	#6 AWG	—	#6	1.62	0.52	0.31	1.01	0.22	100
DA0606-260N	#6 AWG	—	#6	1.24	0.41	0.29	0.74	0.22	100

One - Hole Standard Barrel

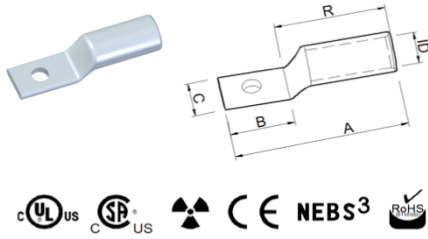
Installation
Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8
Celestra	A45	Gray	29

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA0410-260N	#4 AWG	40-50 Navy 133/.017749/.029 91/24 = 36.7 kcmil	#10	1.79	0.64	0.34	1.06	0.26	100
DA0410N	#4 AWG	40-50 Navy 133/.017749/.029 91/24 = 36.7 kcmil	#10	1.40	0.56	0.37	0.75	0.27	100
DA0414N	#4 AWG	— 40-50 Navy	1/4	1.44	0.60	0.41	0.75	0.27	100
DA0410-250N	#4 AWG	40-50 Navy 133/.017749/.029 91/24 = 36.7 kcmil	#10	1.69	0.54	0.40	1.06	0.28	100
DA0414-250N	#4 AWG	— 40-50 Navy	1/4	1.77	0.62	0.40	1.06	0.28	100
DA0410-261N	#4 AWG	40-50 Navy 133/.017749/.029 91/24 = 36.7 kcmil	#10	1.36	0.52	0.38	0.75	0.28	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

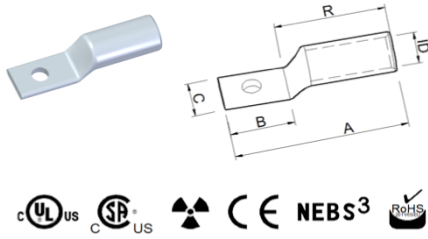


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10
Celestra	A45	Brown	33

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA0210-260N	#2 AWG	—	#10	1.78	0.56	0.42	1.13	0.30	100
DA0214-260N	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.78	0.56	0.42	1.13	0.30	100
DA0256-260N	#2 AWG	—	5/16	1.84	0.62	0.46	1.13	0.30	100
DA0214N	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.59	0.65	0.41	0.85	0.30	100
DA0256N	#2 AWG	—	5/16	1.82	0.88	0.45	0.85	0.30	100
DA0210-250N	#2 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/0223	#10	1.76	0.54	0.42	1.13	0.31	100
DA0214-250N	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.85	0.63	0.42	1.13	0.31	100
DA0214-261N	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.61	0.64	0.46	0.88	0.36	100
DA0256-261N	#2 AWG	—	5/16	1.67	0.70	0.46	0.88	0.36	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

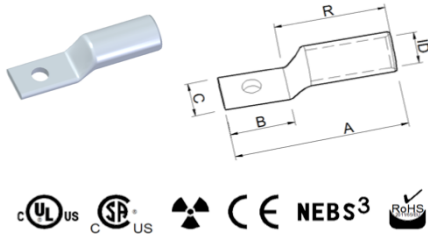


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Green	37
Panduit	CT-720 CT-1700	Green	P37
Burndy	MY29 Y644M	Green	11
Celestra	A45	Green	37

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA0110-250N	#1 AWG	—	#10	1.76	0.54	0.47	1.13	0.36	100
DA0114-250N	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.85	0.63	0.47	1.13	0.36	100
DA0110-260N	#1 AWG	225/24 #1 Weld	#10	2.16	0.94	0.46	1.13	0.36	100
DA0114-260N	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.16	0.94	0.46	1.13	0.36	100
DA0114N	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.59	0.65	0.47	0.85	0.36	100
DA0156N	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	1.72	0.78	0.47	0.85	0.36	100

One - Hole Standard Barrel

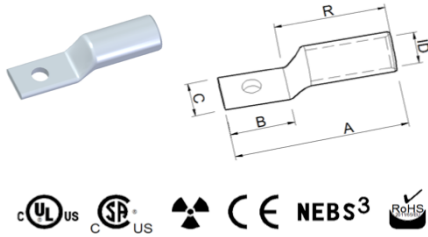
Installation
Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Pink	42
Panduit	CT-720 CT-920	Pink	P42
Burndy	MY29 Y644M	Pink	12
Celestra	A45	Pink	42

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA1010-250N	#1/0 AWG	—	#10	1.82	0.54	0.52	1.22	0.39	100
DA1014-250N	#1/0 AWG	—	1/4	1.98	0.70	0.52	1.22	0.39	100
DA1056-250N	#1/0 AWG	—	5/16	2.04	0.76	0.52	1.22	0.39	100
DA1010-260N	#1/0 AWG	-	#10	2.16	0.94	0.51	1.16	0.39	100
DA1014-260N	#1/0 AWG	—	1/4	1.89	0.67	0.51	1.16	0.39	100
DA1056-260N	#1/0 AWG	—	5/16	2.16	0.94	0.51	1.16	0.39	100
DA1038-260N	#1/0 AWG	#100 Navy	3/8	2.07	0.85	0.55	1.16	0.39	100
DA1014N	#1/0 AWG	—	1/4	1.69	0.65	0.52	0.98	0.40	100
DA1056N	#1/0 AWG	—	5/16	1.82	0.78	0.52	0.98	0.40	100
DA1038N	#1/0 AWG	—	3/8	1.97	0.93	0.52	0.98	0.40	100
DA1014-261N	#1/0 AWG	—	1/4	1.67	0.64	0.56	0.97	0.44	100
DA1056-261N	#1/0 AWG	—	5/16	1.73	0.70	0.56	0.97	0.44	100
DA1038-261N	#1/0 AWG	—	3/8	1.86	0.83	0.56	0.97	0.44	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

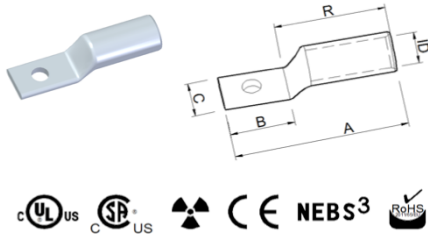


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13
Celestra	A45	Black	45

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA2038N-1	#2/0 AWG	—	3/8	1.93	0.93	0.57	1.00	0.44	100
DA2010-260N	#2/0 AWG	—	#10	2.44	1.14	0.56	1.24	0.44	100
DA2014-260N	#2/0 AWG	—	1/4	1.89	0.59	0.56	1.24	0.44	100
DA2056-260N	#2/0 AWG	—	5/16	2.44	1.14	0.56	1.24	0.44	100
DA2038-260N	#2/0 AWG	—	3/8	2.30	1.00	0.56	1.24	0.44	100
DA2014N	#2/0 AWG	—	1/4	1.71	0.65	0.57	1.00	0.45	100
DA2038N	#2/0 AWG	—	3/8	1.87	0.82	0.57	1.00	0.45	100
DA2010-250N	#2/0 AWG	1/0 Weld	#10	1.88	0.54	0.58	1.28	0.45	100
DA2014-250N	#2/0 AWG	275/24	1/4	2.12	0.78	0.58	1.28	0.45	100
DA2056-250N	#2/0 AWG	—	5/16	2.12	0.78	0.58	1.28	0.45	100
DA2038-250N	#2/0 AWG	—	3/8	2.18	0.84	0.58	1.28	0.45	100
DA2056-261N	#2/0 AWG	—	5/16	1.87	0.70	0.63	1.11	0.50	100
DA2038-261N	#2/0 AWG	—	3/8	2.00	0.83	0.63	1.11	0.50	100
DA2012-261N	#2/0 AWG	—	1/2	2.25	1.08	0.67	1.11	0.50	100
DA2014-251N	#2/0 AWG	—	1/4	2.06	0.88	0.59	1.05	0.51	100
DA2010-250N-1	#2/0 AWG	—	#10	1.86	0.56	0.58	1.28	0.45	100
DA2014(N)	2/0 AWG	275/24	1/4	1.65	0.65	0.57	—	0.00	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

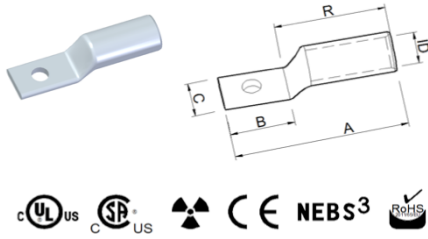


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Orange	50
Panduit	CT-720 CT-920	Orange	P50
Burndy	MY29 Y644M	Orange	14
Celestra	A45	Orange	50

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA3014-260N	#3/0 AWG	—	1/4	2.06	0.67	0.62	1.32	0.50	100
DA3056-260N	#3/0 AWG	—	5/16	2.16	0.77	0.62	1.32	0.50	100
DA3038-260N	#3/0 AWG	—	3/8	2.53	1.14	0.62	1.32	0.50	100
DA3014N	#3/0 AWG	—	1/4	1.74	0.65	0.63	1.02	0.51	100
DA3038N	#3/0 AWG	—	3/8	1.91	0.82	0.63	1.02	0.51	100
DA3056N	#3/0 AWG	—	5/16	1.87	0.78	0.63	1.02	0.51	100
DA3014-250N	#3/0 AWG	—	1/4	2.31	0.78	0.64	1.46	0.51	100
DA3056-250N	#3/0 AWG	—	5/16	2.31	0.78	0.64	1.46	0.51	100
DA3038-250N	#3/0 AWG	—	3/8	2.37	0.84	0.64	1.46	0.51	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

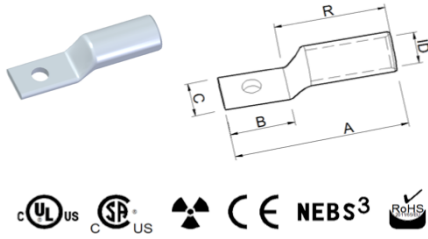


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Purple	54
Panduit	CT-720 CT-920	Purple	P54
Burndy	MY29 Y644M	Purple	15
Celestra	A45	Purple	54

Wire Size			Dimension (in.)						Std. Pkg.
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	
DA4014-260N	#4/0 AWG	—	1/4	2.34	1.07	0.69	1.20	0.56	100
DA4056-260N	#4/0 AWG	—	5/16	2.04	0.77	0.69	1.20	0.56	100
DA4038-260N	#4/0 AWG	—	3/8	2.41	1.14	0.69	1.20	0.56	100
DA4014N	#4/0 AWG	—	1/4	1.99	0.65	0.70	1.27	0.56	100
DA4038N	#4/0 AWG	—	3/8	2.16	0.82	0.70	1.27	0.56	100
DA4010N	#4/0 AWG	—	#10	1.99	0.65	0.70	1.27	0.56	100
DA4056N	#4/0 AWG	—	5/16	2.12	0.78	0.70	1.27	0.56	100
DA4014-250N	#4/0 AWG	—	1/4	2.36	0.78	0.71	1.51	0.57	100
DA4056-250N	#4/0 AWG	—	5/16	2.37	0.79	0.71	1.51	0.57	100
DA4038-250N	#4/0 AWG	—	3/8	2.44	0.86	0.71	1.51	0.57	100
DA4056-261N	#4/0 AWG	—	5/16	2.12	0.70	0.77	1.35	0.64	100
DA4038-261N	#4/0 AWG	—	3/8	2.25	0.83	0.77	1.35	0.64	100
DA4012-261N	#4/0 AWG	—	1/2	2.50	1.08	0.77	1.35	0.64	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

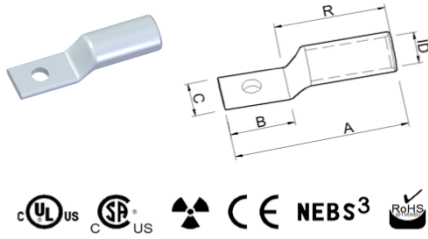


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM6	Yellow	62
Panduit	-	Yellow	-
Burndy	MY29 Y644M	Yellow	16
Celestra	A45	Yellow	62

Wire Size			Dimension (in.)						Std. Pkg.
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	
DA2556-260N	250 kcmil	250 Navy	5/16	2.22	0.72	0.75	1.41	0.61	100
DA2538-260N	250 kcmil	250 Navy	3/8	2.70	1.20	0.75	1.41	0.61	100
DA2514N	250 kcmil	250 Navy	1/4	2.14	0.65	0.77	1.40	0.63	100
DA2556N	250 kcmil	250 Navy	5/16	2.27	0.78	0.77	1.40	0.63	100
DA2538N	250 kcmil	250 Navy	3/8	2.31	0.82	0.77	1.40	0.63	100
DA2514-250N	250 kcmil	250 Navy	1/4	2.47	0.78	0.77	1.60	0.63	100
DA2538-250N	250 kcmil	250 Navy	3/8	2.55	0.86	0.77	1.60	0.63	100
DA2512-250N	250 kcmil	250 Navy	1/2	2.78	1.09	0.77	1.60	0.63	100
DA2556-261N	250 kcmil	250 Navy	5/16	2.19	0.72	0.81	1.38	0.65	100
DA2538BN	250 kcmil	250 Navy	3/8	2.72	1.27	0.85	1.40	0.70	100
DA2538N-1	250 kcmil	250 Navy	3/8	2.48	0.93	0.85	1.40	0.70	100
DA2512-261N	250 kcmil	250 Navy	1/2	2.70	1.20	0.88	1.41	0.70	100
DA2538-251N	250 kcmil	250 Navy	3/8	2.56	0.88	0.88	1.41	0.70	100
DA2538-260NC	250 kcmil	250 Navy	3/8	2.70	1.20	0.75	1.41	0.61	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

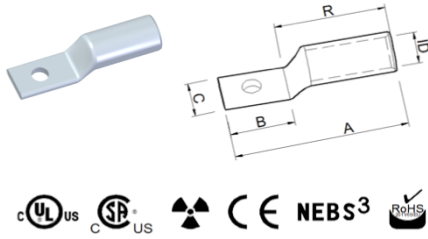


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	White	66
Panduit	CT-720 CT-920	White	P66
Burndy	Y35 Y45	White	17
Celestra	A45	White	66

Wire Size			Dimension (in.)						Std. Pkg.
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	
DA3114-250N	300 kcmil	300 Navy	1/4	2.95	0.97	0.81	1.84	0.65	100
DA3138-250N	300 kcmil	300 Navy	3/8	2.99	1.01	0.81	1.84	0.65	100
DA3114-260N	300 kcmil	300 Navy	1/4	2.28	0.71	0.81	1.43	0.65	100
DA3138-260N	300 kcmil	300 Navy	3/8	2.77	1.20	0.81	1.43	0.65	100
DA3114N	300 kcmil	300 Navy	1/4	2.47	0.88	0.85	1.45	0.70	100
DA3138N	300 kcmil	300 Navy	3/8	2.41	0.82	0.85	1.45	0.70	100
DA3112N	300 kcmil	300 Navy	1/2	2.65	1.06	0.85	1.45	0.70	100
DA3156N	300 kcmil	300 Navy	5/16	2.37	0.78	0.85	1.45	0.70	100
DA3156-261N	300 kcmil	300 Navy	5/16	2.43	0.70	0.95	1.59	0.76	100
DA3138-261N	300 kcmil	300 Navy	3/8	2.56	0.83	0.95	1.59	0.76	100
DA3112-241N	313 kcmil	300 Weld 775/24	1/2	2.80	1.25	0.93	1.55	0.75	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

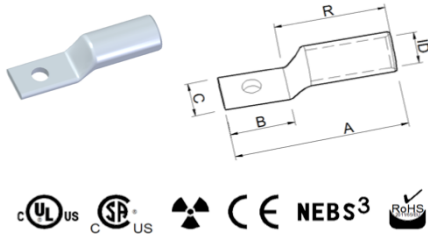


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-920	Red	P71
Burndy	Y35 Y45	Red	18
Celestra	A45	Red	71

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA3538-250N	350 kcmil	350 Navy	3/8	3.09	1.01	0.88	1.94	0.70	100
DA3512-250N	350 kcmil	350 Navy	1/2	3.20	1.12	0.88	1.94	0.70	100
DA3538-260N	350 kcmil	350 Navy	3/8	3.15	1.45	0.88	1.56	0.70	100
DA3512-260N	350 kcmil	350 Navy	1/2	2.84	1.14	0.88	1.56	0.70	100
DA3512N	350 kcmil	350 Navy	1/2	2.94	1.25	0.93	1.55	0.75	100
DA3538N	350 kcmil	350 Navy	3/8	2.69	1.00	0.93	1.55	0.75	100
DA3512NC	350 kcmil	350 Navy	1/2	2.75	1.06	0.93	1.55	0.75	100
DA3538-261N	350 kcmil	350 Navy	3/8	2.76	0.85	1.06	1.77	0.84	100
DA3512-261N	350 kcmil	350 Navy	1/2	3.01	1.10	1.06	1.77	0.84	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

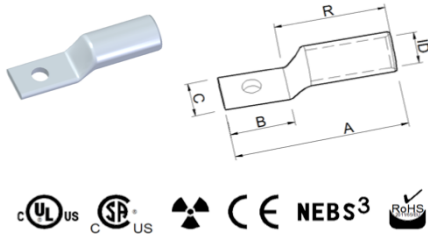


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Blue	76
Panduit	CT-720 CT-920	Blue	P76
Burndy	Y35 Y45	Blue	19
Celestra	A45	Blue	76

Wire Size			Dimension (in.)						Std. Pkg.
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	
DA4138-250N	400 kcmil	400 Navy	3/8	3.41	1.17	0.95	2.10	0.76	100
DA4112-250N	400 kcmil	400 Navy	1/2	3.41	1.17	0.95	1.79	0.76	100
DA4138-260N	400 kcmil	400 Navy	3/8	3.13	1.20	0.95	1.79	0.76	100
DA4112-260N	400 kcmil	400 Navy	1/2	3.13	1.20	0.95	2.45	0.76	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

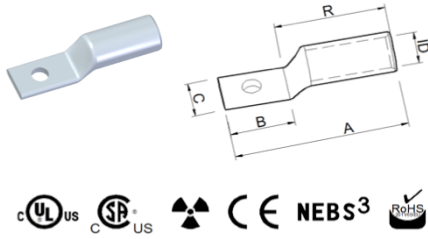


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM8 TBM12	Brown	87
Panduit	CT-720 CT-920	Brown	P87
Burndy	Y35 Y45	Brown	20
Celestra	A45	Brown	87

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA5138-250N	500 kcmil	500 Navy	3/8	3.50	1.01	1.06	2.39	0.84	100
DA5112-250N	500 kcmil	500 Navy	1/2	3.66	1.17	1.06	2.39	0.84	100
DA5138-260N	500 kcmil	500 Navy	3/8	3.46	1.45	1.06	1.91	0.84	100
DA5112-260N	500 kcmil	500 Navy	1/2	3.46	1.45	1.06	1.91	0.84	100
DA5112N	500 kcmil	500 Navy	1/2	3.39	1.25	1.10	2.04	0.88	100
DA5112-261N	500 kcmil	500 Navy	1/2	3.27	1.08	1.25	2.09	0.98	100
DA5120-261N	500 kcmil	500 Navy	M20	3.70	1.51	1.25	2.09	0.98	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

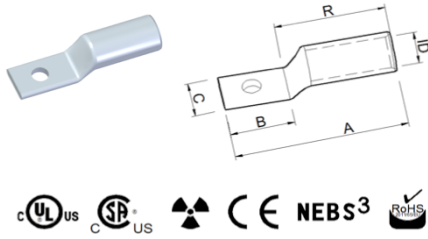


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14	Green	94
Panduit	CT-920 CT-980	Green	P94
Burndy	Y35 Y45	Green	22
Celestra	A45	Green	94

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA6138-250N	600 kcmil	—	3/8	3.60	1.01	1.19	2.49	0.92	100
DA6112-250N	600 kcmil	—	1/2	4.36	1.77	1.19	2.49	0.92	100
DA6138-260N	600 kcmil	—	3/8	3.92	1.70	1.19	2.12	0.93	100
DA6112-260N	600 kcmil	—	1/2	3.39	1.17	1.19	2.12	0.93	100

COMPRESSION CONNECTORS

One - Hole Standard Barrel

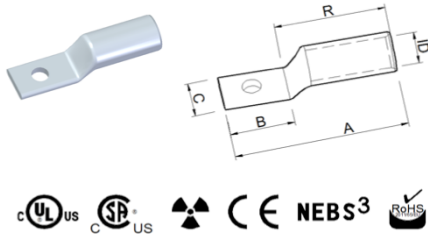


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-980	Black	P106
Burndy	Y35 Y45	Black	24
Celestra	A45	Black	106

Wire Size			Dimension (in.)						
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA7538-250N	750 kcmil	—	3/8	3.91	1.19	1.30	2.72	1.03	100
DA7512-250N	750 kcmil	—	1/2	4.10	1.38	1.30	2.72	1.03	100
DA7558-250N	750 kcmil	—	5/8	4.66	1.94	1.30	2.72	1.03	100
DA7538-260N	750 kcmil	—	3/8	3.96	1.70	1.30	2.26	1.03	100
DA7512-260N	750 kcmil	—	1/2	3.96	1.70	1.30	2.26	1.03	100
DA7558-260N	750 kcmil	—	5/8	3.69	1.43	1.30	2.26	1.03	100
DA7512N	750 kcmil	—	1/2	3.62	1.25	1.33	2.37	1.06	100
DA7556N	750 kcmil	—	5/16	3.15	0.78	1.33	2.37	1.06	100
DA7558N	750 kcmil	—	5/8	3.94	1.58	1.33	2.37	1.06	100
DA7538-261N	750 kcmil	—	3/8	3.69	1.20	1.50	2.49	1.17	100
DA7512-261N	750 kcmil	—	1/2	3.75	1.26	1.50	2.49	1.17	100

One - Hole Standard Barrel

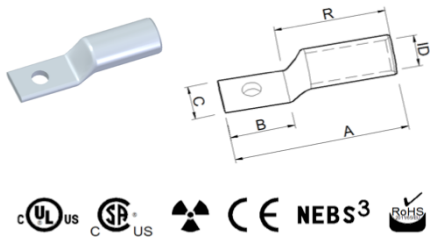

Installation Information			
Manufacturer	Tools	Color	Code
T&B	15TON 40TON	Orange	107
Panduit	-	Orange	-
Burndy	Y35 Y46	Orange	25
Celestra	A45	Orange	107

Wire Size				Dimension (in.)					
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	R	ID	Std. Pkg.
DA9158N	900 kcmil	1925/24	5/8	4.04	1.50	1.50	2.54	1.19	100