


COMPRESSION CONNECTORS

Two - Holes Stand Barrel

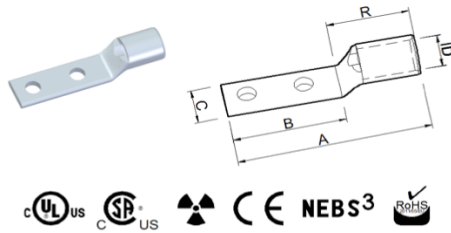


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8
Celestra	A45	Gray	29

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB041458N	#4 AWG	91/24	1/4	2.33	1.19	0.41	0.63	1.05	0.27	100
LB041058P-250N	#4 AWG	—	#10	2.70	1.20	0.36	0.63	1.50	0.28	100
LB041058P-261N	#4 AWG	—	#10	2.70	1.20	0.38	0.63	1.50	0.28	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

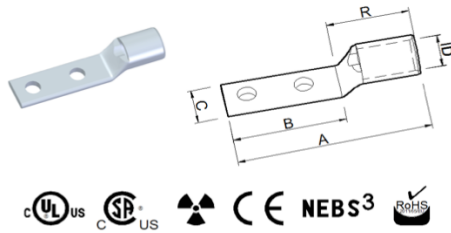


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10
Celestra	A45	Brown	33

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB021458P-251N	#2 AWG	—	1/4	2.87	1.26	0.47	0.63	1.61	0.36	100
LB025634N	#2 AWG	—	5/16	2.87	1.63	0.45	0.75	1.15	0.30	100
LB021034P-260N	#2 AWG	—	#10	2.15	1.27	0.47	0.63	0.88	0.36	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

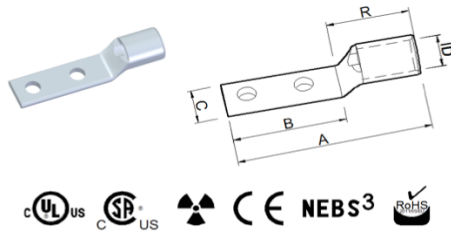


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Green	37
Panduit	CT-720 CT-1700	Green	P37
Burndy	MY29 Y644M	Green	11
Celestra	A45	Green	37

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB015678N	#1 AWG	—	5/16	2.84	1.63	0.47	0.88	1.13	0.36	100
LB011034N	#1 AWG	—	#10	2.61	1.40	0.47	0.75	1.13	0.36	100
LB011401N	#1 AWG	—	1/4	2.79	1.58	0.47	1.00	1.13	0.36	100
LB011458N	#1 AWG	—	1/4	2.40	1.19	0.47	0.63	1.13	0.36	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

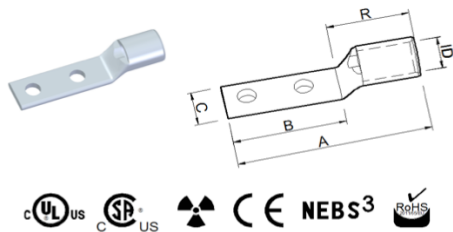


Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Pink	42
Panduit	CT-720 CT-920	Pink	P42
Burndy	MY29 Y644M	Pink	12
Celestra	A45	Pink	42

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB105678N	#1/0 AWG	—	5/16	3.02	1.63	0.52	0.88	1.33	0.40	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

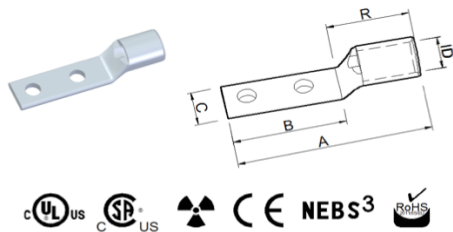


Installation Information			
Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13
Celestra	A45	Black	45

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB201243N	#2/0 AWG	125 Navy	1/2	4.22	2.81	0.63	1.75	1.35	0.45	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

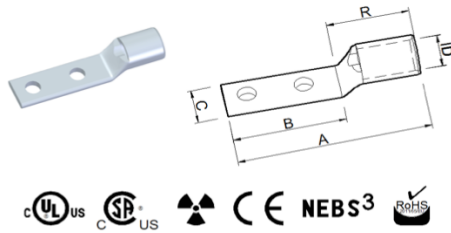


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Orange	50
Panduit	CT-720 CT-920	Orange	P50
Burndy	MY29 Y644M	Orange	14
Celestra	A45	Orange	50

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB301243N	#3/0 AWG	-	1/2	4.54	3.00	0.63	1.75	1.47	0.51	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

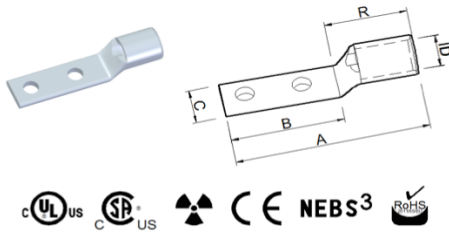


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Purple	54
Panduit	CT-720 CT-920	Purple	P54
Burndy	MY29 Y644M	Purple	15
Celestra	A45	Purple	54

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB401243N	#4/0 AWG	—	1/2	4.79	3.00	0.70	1.75	1.72	0.56	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

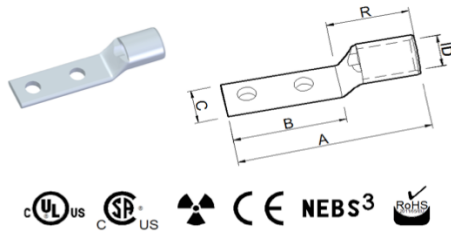


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16
Celestra	A45	Yellow	62

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB251243N	250 kcmil	250 Navy	1/2	5.04	3.00	0.77	1.75	1.95	0.63	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

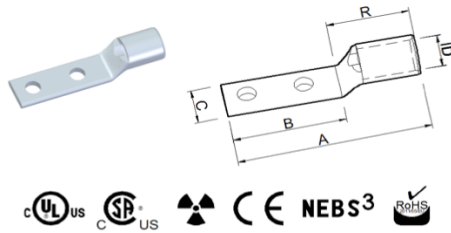


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	White	66
Panduit	CT-720 CT-920	White	P66
Burndy	Y35 Y45	White	17
Celestra	A45	White	66

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB311458N	300 kcmil	300 Navy	1/4	3.33	1.19	0.85	0.63	2.00	0.70	100
LB315678N	300 kcmil	-	5/16	3.77	1.64	0.85	0.88	2.00	0.70	100
LB311243N	300 kcmil	300 Navy	1/2	5.14	3.00	0.85	1.75	2.00	0.70	100
LB313878N	300 kcmil	300 Navy	3/8	3.97	1.64	0.85	0.88	2.20	0.70	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

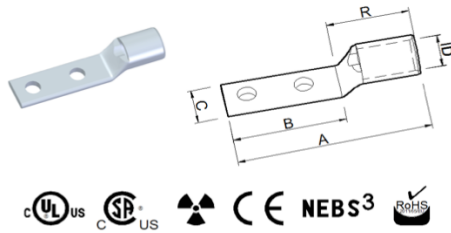


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM8 TBM12	Brown	87
Panduit	CT-720 CT-920	Brown	P87
Burndy	Y35 Y45	Brown	20
Celestra	A45	Brown	87

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB511243P-251N	500 kcmil	500 Navy	1/2	6.60	3.01	1.30	1.75	3.52	1.03	100
LB511243N	500 kcmil	500 Navy	1/2	5.90	2.81	1.10	1.75	2.99	0.88	100
LB513801N	500 kcmil	500 Navy 925/24 = 373 kcmil	3/8	5.02	1.93	1.10	1.00	2.99	0.88	100
LB513843N	500 kcmil	500 Navy	3/8	5.60	2.51	1.10	1.75	2.99	0.88	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

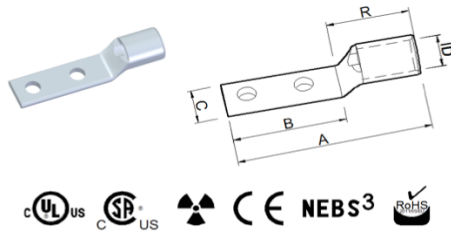


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14	Green	94
Panduit	CT-920 CT-980	Green	P94
Burndy	Y35 Y45	Green	22
Celestra	A45	Green	94

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB611243N	600 kcmil	1100/24 = 444 kcmil	1/2	6.05	2.81	1.20	1.75	3.14	0.96	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

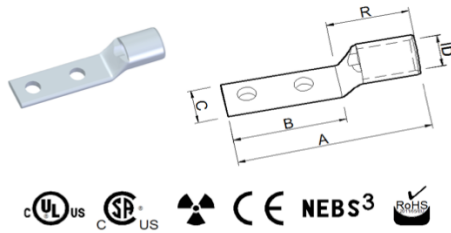


Installation Information

Manufacturer	Tools	Color	Code
T&B	40TON TBM8-750	Pink	99
Panduit	-	Pink	-
Burndy	Y39 Y644M	Pink	400
Celestra	A45	Pink	99

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB711243N	700 kcmil	—	1/2	5.99	2.75	1.25	1.75	3.24	0.97	100
LB711243NP	700 kcmil	—	1/2	5.99	2.75	1.25	1.75	3.24	0.97	100
LB713801NP	700 kcmil	—	3/8	5.00	1.76	1.25	1.00	3.24	0.97	100

COMPRESSION CONNECTORS

Two - Holes Stand Barrel

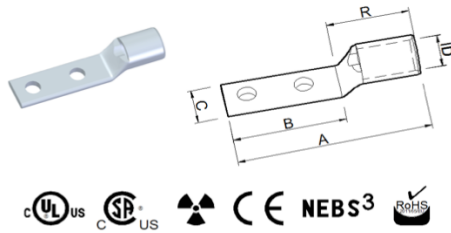

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-980	Black	P106
Burndy	Y35 Y45	Black	24
Celestra	A45	Black	106

Wire Size			Dimension (in.)							
Cat. Nos	Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	G	R	ID	Std. Pkg.
LB751243N	750 kcmil	—	1/2	6.05	2.81	1.33	1.75	3.24	1.06	100
LB751243NP	750 kcmil	—	1/2	5.99	2.75	1.33	1.75	3.24	1.06	100
LB753801NP	750 kcmil	—	3/8	5.05	1.82	1.33	1.00	3.24	1.06	100